

Commercial Grade Transformers

304 Brushed Stainless Steel

Ordering Guide

Product Code	Max VA
TR15SS-300	300VA
TR15SS-600	600VA
TR15SS-900	900VA
TR15SS-1200	1200VA



Housing:

- Brushed 304 grade stainless steel
- Hinged cover for easy access
- Plug-in photocell and timer socket in weatherproof compartment
- Bottom panel contains one large 1 1/2" conduit inlet and four 3/4" knockouts for lead exit
- 1/2" knockout side for accessory mounting

Electrical:

- Input Voltage: 120V
- Magnetic circuit breaker for every 300w circuit
- Output Voltage Taps: 12/13/14/15 Volts
- TR15SS-1200 also includes 17, 20, and 22V taps

Protection:

- In-line primary overload protection prevents system damage with auto thermal shut-off
- In-line secondary magnetic breaker prevents short circuit protection with reset

Terminals:

- Extra-large terminal block for convenient low voltage cable connections

Mounting:


- Mounting brackets located on top and bottom of the console

Warranty:

- Backed by a limited lifetime warranty to be free from defects in material and/or workmanship

TR15SS-300 - 5.75"
 TR15SS-600 - 6.75"
 TR15SS-900 - 8"
 TR15SS-1200 - 6.25"

TR15SS-300 - 11.25"
 TR15SS-600 - 12.5"
 TR15SS-900 - 13.5"
 TR15SS-1200 - 17.5"

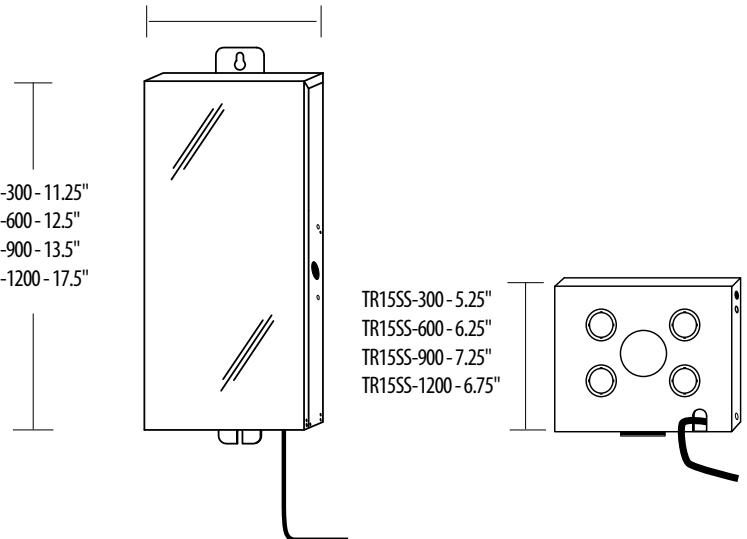

TR15SS-300 - 5.25"
 TR15SS-600 - 6.25"
 TR15SS-900 - 7.25"
 TR15SS-1200 - 6.75"